



## INSTRUCCIONES DE MONTAJE. INSTALACIÓN EMPOTRADA EN PARED BETA Y CINCA.




- 1.-Colocar en el alojamiento la caja de chapa galvanizada e introducir por cualquiera de las entradas premarcadas el tubo de conexión.
- 2.- Introducir los cables de conexión por la base.
- 3.- BETA: Sujetar la base con los tornillos 3,5 x 13 en el agujero superior de la caja.  
CINCA: Sujetar la base con los tornillos 3,5 x 22 + taco en el agujero superior de la caja.
- 4.-Montar el resto de componentes tal y como se indica en los dibujos.
- 5.-En los modelos Beta y Cinca estancos sustituir el tornillo del difusor por uno de 19 x 40 suministrado en la bolsa.
- 6.-En los modelos Cinca agujerear el difusor e introducir los mismos tornillos.

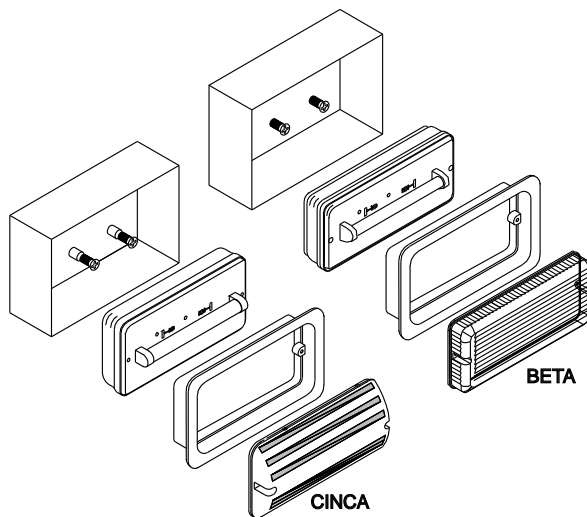

## INSTALLATION INSTRUCTIONS. WALL MOUNTING BETA&CINCA SERIES



1. Put the metal box into the wall hole. The connecting pipe can be introduced through any of the pre-marked holes.
2. Take the base from the luminary and put the power line in.
3. Fix the base by means of two screws enclosed.  
BETA: 3,5x13mm. Screws  
CINCA: 3,5x22mm. Screws and the two plastic gap.
4. Mount base and reflector together as is shown in the figure.
5. Fix the diffuser to the reflector.  
BETA: Use 19x40mm. screws enclosed, not use the luminary screws.  
CINCA: Drill the diffuser (use the screwdriver) and screw on the 19x40mm. screws enclosed. When the Cinca is a IP44 model screw on slightly.

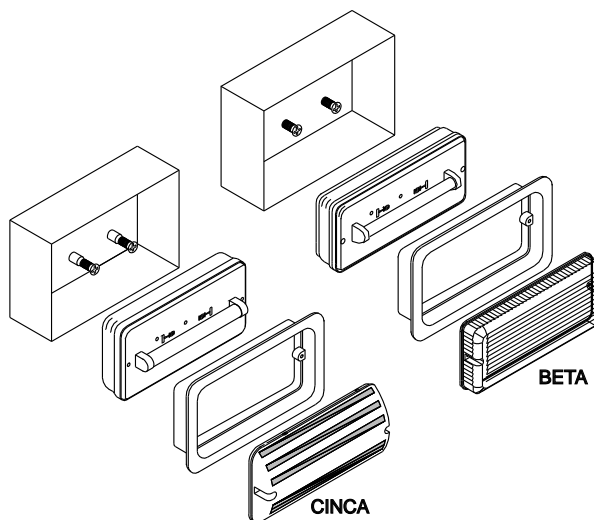

**IVERLUX,S.L.**

Ventura Rodríguez, 42  
50007 ZARAGOZA

MADE IN SPAIN  
07.03.05



**IVERLUX,S.L.**

Ventura Rodríguez, 42  
50007 ZARAGOZA

MADE IN SPAIN  
07.03.05

